

New Concept for the Design of Flexible Pavement at Critical Highway Sections

Ahmed El-Desouky, Gamal El-Sheaky

Abstract— The design procedure of flexible pavement to be completely rational in nature, consideration should be given to all forces acting on pavement through the vehicle's tire. Although the horizontal forces (HF) on the pavements are of significant values, all pavement design methods do not take the actions of these forces on the pavement system into consideration. This may appear to be unrealistic load condition. Previous studies concluded that horizontal forces have significant effect on the response of flexible pavements. The main objective of this research is to recommend/quantify solutions to eliminate the effect of these forces on the response of flexible pavements. To achieve this objective theoretical analysis, using finite element technique, was performed to investigate the response of different flexible pavement sections under various wheel loads. Linear analysis was conducted using the computer program ANSYS 12.1. The basic measuring parameters of flexible pavement in this study were; the maximum surface deflection (SD), the maximum horizontal tensile strain at the bottom of asphalt concrete layer (ϵ_t) and the maximum compressive strain at the top of subgrade (ϵ_c). A total of 643 cases were studied to investigate the effect of HF on the behavior of asphalt pavements. Based on the response of asphalt pavement under HF, recommended pavement sections were adopted to eliminate the effect of HF. Reduction of the effect of HF on the flexible pavement response may achieved by increasing the AC layer thickness (h_1) followed by the asphalt concrete layer modulus (E_1) or by increasing the base layer modulus (E_2).

Index Terms— Flexible Pavement, Horizontal Forces, Design, Critical Sections.

I. INTRODUCTION

There are three forces acting on the tire from the pavement. Tractive force (or longitudinal force) F_x is the component in the X direction of the resultant force exerted on the tire by the road. Lateral force F_y is the component in the Y direction, and normal force F_z is the component in the Z direction (vertical load, VL). Although horizontal forces are of significant values, most of the design methods for flexible pavement do not take the effect of horizontal forces into consideration. They used only the effect of vertical wheel load or axle load [1].

In (1999) Khedr et al. studied the effect of HF on the performance of flexible pavements. Although they suggested to increase the thickness of surface layer and to enhance the properties of asphalt concrete (AC) layer to maintain high modulus, they did not quantify the required amount of increase of both AC thicknesses and modulus. In addition, they did not study the effect of base layer thickness and modulus [2]. El-Desouky et al. (1999) found that AC layer modulus (E_1) has significant effect on the flexible pavement

response and the predicted pavement life. There was a so-called critical modulus E_1 at which ϵ_t is a maximum. The critical E_1 values decreased as h_1 increased under various wheel loads. For E_1 values below the critical values there was a significant effect horizontal force (HF) on flexible pavement response. On other words, the effect of HF decreased with increasing E_1 [3]. Similar findings were obtained after studying the response of flexible pavements under trucked vehicle loads and aircraft loads [4, 5]. El-Desouky and El-Shikhy (2014) studied the effect of base thickness and base modulus on the response of flexible pavement under various wheel loads. They found that the effect of horizontal forces on flexible pavement response decreases with; increasing asphalt concrete layer thickness (h_1), increasing base layer modulus (E_2) and/or increasing asphalt concrete layer modulus (E_1) [6].

The main objective of this paper is to eliminate the effects of horizontal forces, if exist at critical highway sections, on the response of flexible pavements through quantifying the required increase in different layers thickness and/or modulus. To achieve this objective, theoretical analysis, using finite element technique, was performed to investigate the response of different flexible pavement sections under various wheel loading schemes. Linear analysis was performed using computer program (ANSYS 12.1) [7]. The basic measuring parameters of flexible pavement in this thesis are, the maximum surface deflection (SD), the maximum horizontal tensile strain at the bottom of asphalt concrete layer (ϵ_t) and the maximum compressive strain at the top of subgrade (ϵ_c). The pavement structure was composed of three layers; asphalt surface, untreated base, and subgrade. The studied variables were HF values, layers thickness (h_1, h_2) and layers modulus (E_1, E_2). Results of a previous study [6] were used in this research where HF in addition to VL were applied to the pavement structural sections referred here as original sections. New pavement sections, if required, were studied and compared to the original sections to determine recommended pavement sections that could eliminate the effect of HF.

II. FINITE ELEMENT MODELING

As mentioned before, flexible pavement structure was assumed to have three layers. The interface between any two consecutive layers was assumed to be perfectly bonded as recommended by the asphalt institute [8]. A set of boundary conditions was defined for the model to provide stability to the structural system. The analysis model was established with a fixed boundary at the bottom and roller supports on sides. This conforms to the assumptions of Uddin et al. [9]. In this study, a single wheel load of 40 kN (9000 lb) was applied over a circular contact area of 30 cm diameter. The tire pavement contact pressure was 80 psi (5.7 kg/cm²). This represented the vertical wheel load VL. The analysis was focused on the effect of horizontal force (HF) in additional to vertical wheel load (VL) on the maximum

Revised Version Manuscript Received on October 29, 2015.

Assoc. Prof. Ahmed El-Desouky, Department of Civil Engineering, Military Technical College, Cairo, Egypt.

Eng. Gamal El-Sheaky, Ph.D. Candidate, Department of Civil Engineering, Military Technical College, Cairo, Egypt.

surface deflection, the maximum horizontal tensile strain (ϵ_t) at the bottom of the AC layer and the maximum vertical compressive strain (ϵ_c) at the top of subgrade. Table 1 shows the layers properties data [6].

TABLE I. LAYER PROPERTIES DATA [6].

Layer	Thickness (cm)	Modulus (MPa)	Poisson's ratio
AC	5/10/15/20	750-2250	0.35
Untreated base	20/35	100/250	0.30
Subgrade	80/90/100	50	0.40

III. EFFECT OF HF ON THE RESPONSE OF FLEXIBLE PAVEMENTS

The Results showed that, the maximum horizontal tensile strain at bottom of the AC layer (ϵ_t) is changed significantly when horizontal forces were applied to the pavement structure. In addition it was noticed that the compressive strain at the top of subgrade layer (ϵ_c) did not change under effect of all horizontal forces values. Detailed results and analysis of results can be found elsewhere [6].

Based on these results it is planned to study how to control the maximum horizontal tensile strain (ϵ_t) under application of HF. The HF value of 0.6 VL had a significant effect on maximum horizontal tensile strain (ϵ_t) for all studied cases. For $h_1= 5$ cm only, all values of HF had significant effects on ϵ_t . As $h_1, h_2, E_1,$ and E_2 increased the effect of HF on ϵ_t decreased. The following paragraphs introduce the concept of eliminating the effect of HF on the

horizontal tensile strain at the bottom of AC layer for HF = 0.6 VL.

IV. ELIMINATING THE EFFECT OF HORIZONTAL FORCES

This part of research concerns with the concepts of eliminating the effect of horizontal force on the response of the flexible pavements. Fig. 1 – (a) shows the relationship between ϵ_t and E_1 for $h_1 = 5$ cm and $h_2 = 20$ cm for both $E_2 = 100$ MPa and $E_2 = 250$ MPa under VL only (plotted in dotted lines). On the same figure, all cases, where 0.6 VL was applied as HF to the pavement structure, were plotted. The figure illustrates some close curves to the curve of VL only where $h_1 = 5$ cm, $h_2 = 20$ cm. Fig. 1 – (b) presents the solution to eliminate the effect of HF on ϵ_t . The figure shows that for $E_2 = 100$ MPa on normal road sections, $h_1 = 5$ cm, and $h_2 = 20$ cm might be used. While at critical sections where HF exists, there are two choices. The first one is to increase h_1 to 10 cm and use surface layer of modulus $E_1 \geq 1250$ MPa. The second recommended solution is to increase h_1 to 15 cm. For $E_2 = 250$ MPa, $h_1= 15$ cm and $h_2 = 35$ cm might be used in case of HF existence instead of 5 cm and 20 cm respectively.

Similarly, when normal road section has $h_1 = 10$ cm and $h_2 = 20$ cm as shown in Fig. 2, it is seen that the closest curve to the curve of VL only for $h_1 = 10$ cm, $h_2 = 20$ cm and $E_2 = 100$ MPa is the curve of $h_1 = 10$ cm and $h_2 = 35$ cm when HF of 0.6 VL exists, i.e., h_2 should be increased from 20 cm to 35 cm to eliminate the effect of HF. This solution is valid only for E_1 values ≥ 1750 MPa. Another solution is to use better base course of modulus $E_2 = 125$ MPa. Also when $E_2 = 250$ MPa, the best solution to eliminate the effect of HF is to use $h_1 = 15$ cm and $h_2 = 35$ cm when HF exists.



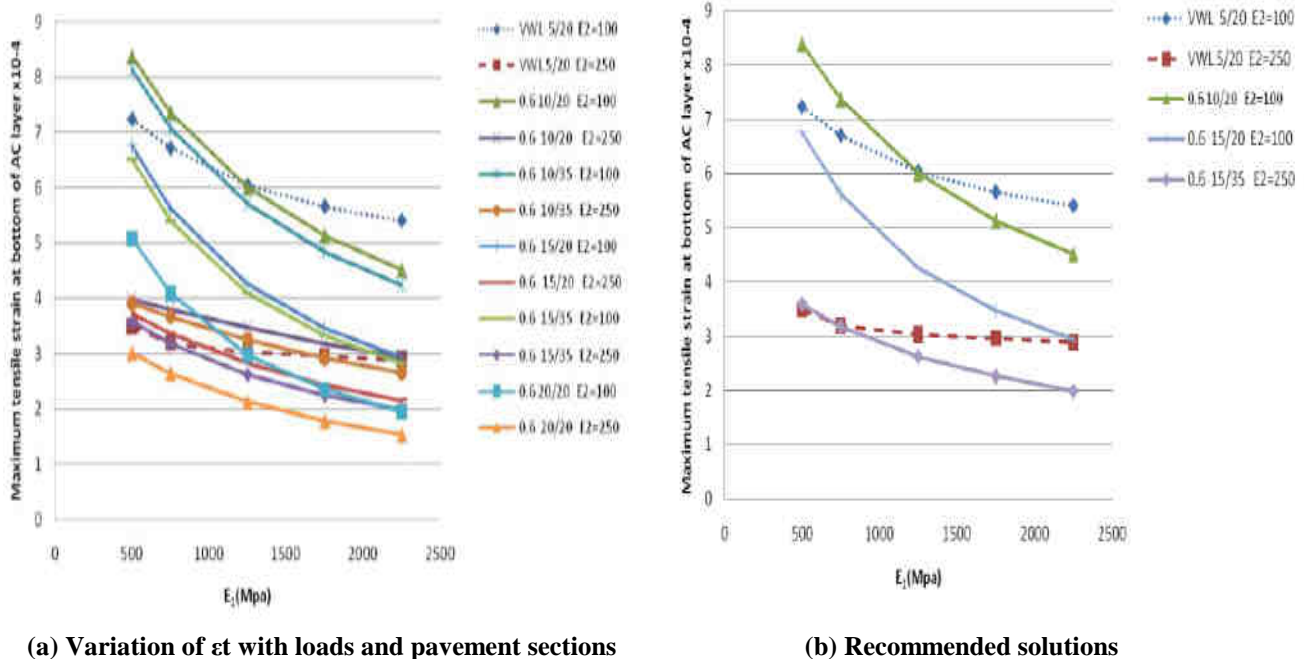


Figure 1. Elimination of the effect of HF for $h_1 = 5$ cm and $h_2 = 20$ cm.

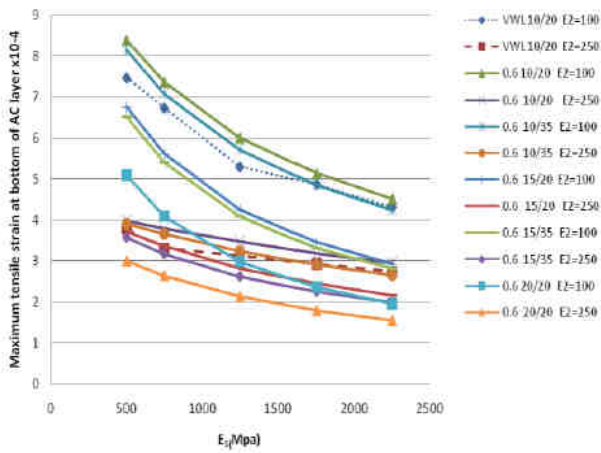

(a) Variation of ϵ_t with loads and pavement sections

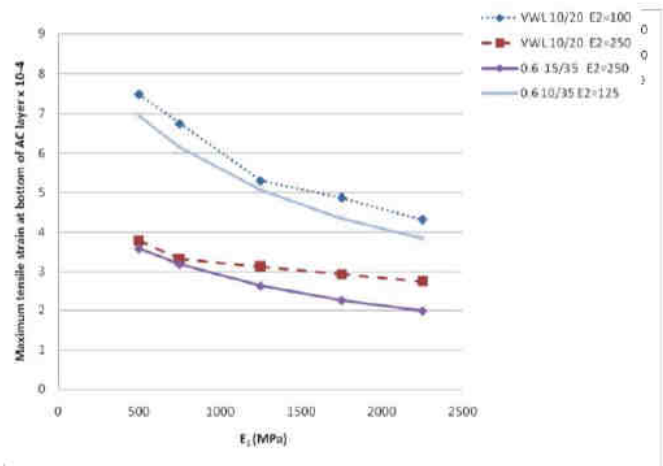

(b) Recommended solutions

Figure 2. Elimination of the effect of HF for $h_1 = 10$ cm and $h_2 = 20$ cm.


For the case of $h_1 = 10$ cm and $h_2 = 35$ cm, as shown in Fig. 3, there are some close curves to the curve of VL only. At critical section when HF exists, the normal road section where $h_1 = 10$ cm, $h_2 = 35$ cm and $E_2 = 100$ MPa might be replaced by a section of $h_1 = 15$ cm and $h_2 = 20$ cm. While when $E_2 = 250$ MPa the recommended section consists of $h_1 = 15$ cm and $h_2 = 35$ cm and modulus of AC layer should be ≥ 750 MPa to eliminate the effect of horizontal forces on maximum horizontal tensile strain.

Next case is when normal road section has $h_1 = 15$ cm and $h_2 = 20$ cm. When $E_2 = 100$ MPa as shown in Fig. 4, the recommended solution for this case is to increase h_2 to 35 cm. While when $E_2 = 250$ cm the best solution is to use $h_1 = 15$ cm, $h_2 = 35$ cm and $E_1 \geq 750$ MPa.


Fig. 5 illustrates some close curves to the curve of VL only when $h_1 = 15$ cm, $h_2 = 35$ cm. The solution to eliminate

the effect of the HF on ϵ_t when $E_2 = 100$ MPa is to replace the normal road section by the recommended section of $h_1 = 15$ cm, $h_2 = 20$ cm and $E_2 = 125$ MPa. For $E_2 = 250$ MPa, it is recommended to use $h_1 = 20$ cm, $h_2 = 20$ cm. The second recommended solution is to use $h_1 = 20$ cm, $h_2 = 20$ cm and $E_2 = 200$ MPa but E_1 should ≥ 750 MPa.

The last case in this study is when the normal road section has $h_1 = 20$ cm and $h_2 = 20$ cm as shown in Fig. 6. The recommended solution for this case is to increase h_2 to 30 cm for both E_2 values of 100 MPa and 250 MPa. Table 2 summarizes the results of the work presented in this paper. In this table, the recommended sections are introduced against original sections to eliminate the effect of HF on the response of flexible pavements at critical road sections where horizontal forces may exist.

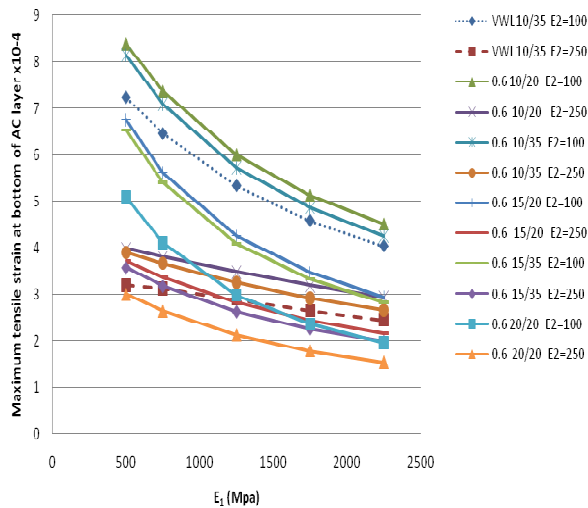


(a) Variation of ϵ_t with loads and pavement sections

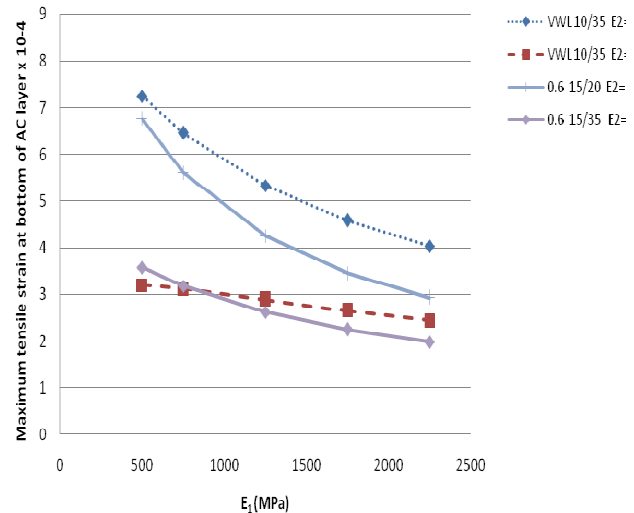


(b) Recommended solutions

Figure 3. Elimination of the effect of HF for $h_1 = 10$ cm and $h_2 = 35$ cm.

New Concept for the Design of Flexible Pavement at Critical Highway Section

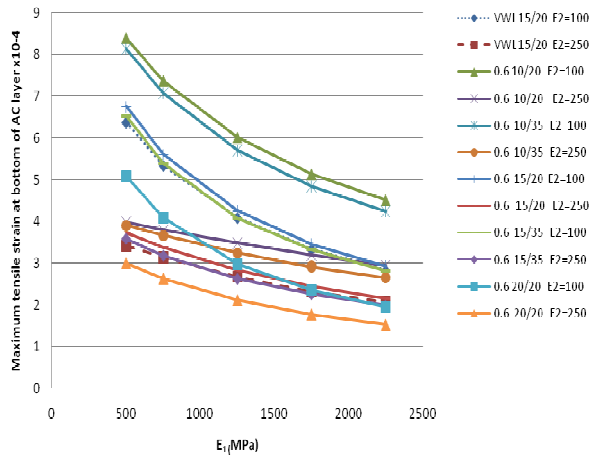


(a) Variation of ϵ_t with loads and pavement sections

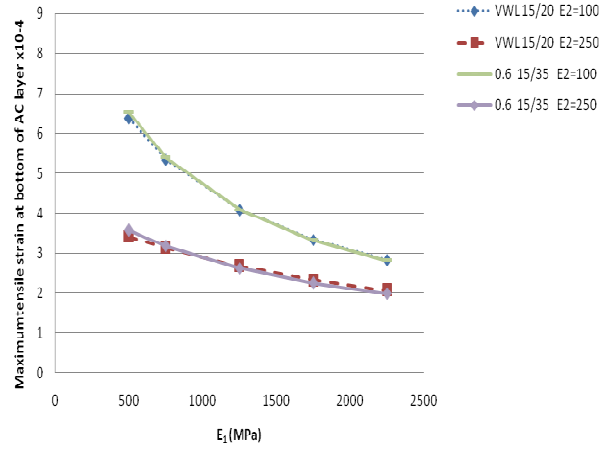


(b) Recommended solutions

Figure 4. Elimination of the effect of HF for $h_1 = 15$ cm and $h_2 = 20$ cm.

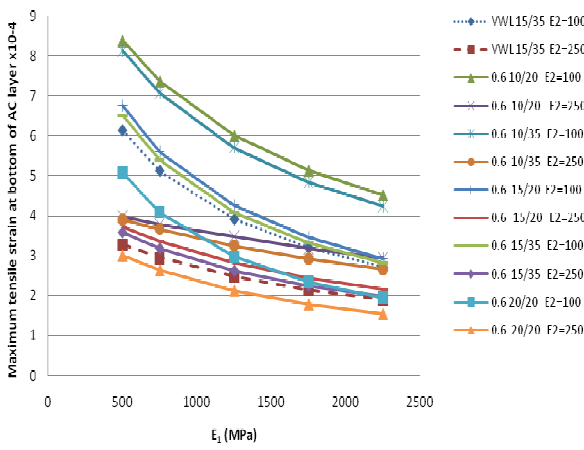


(a) Variation of ϵ_t with loads and pavement sections

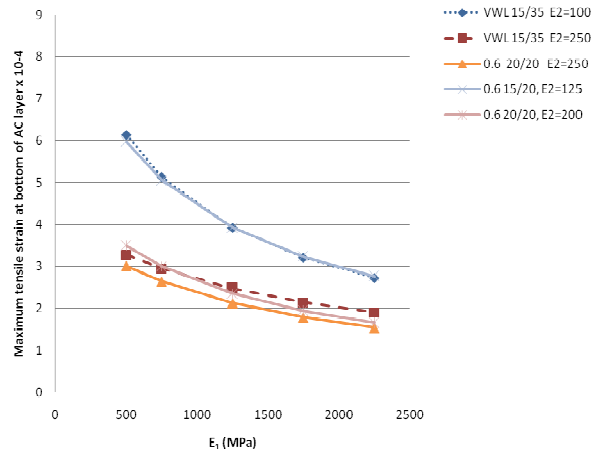


(b) Recommended solutions

Figure 5. Elimination of the effect of HF for $h_1 = 15$ cm and $h_2 = 35$ cm.

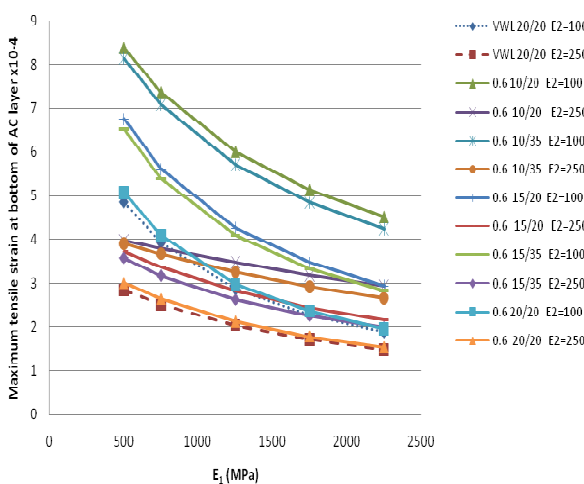

(a) Variation of ϵ_t with loads and pavement sections

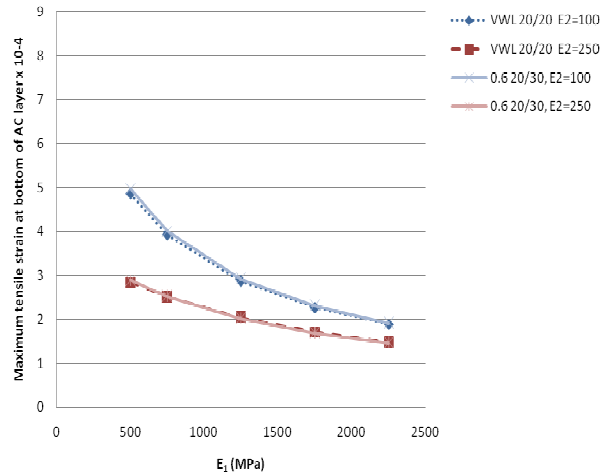

(b) Recommended solutions

Figure 6. Elimination of the effect of HF for $h_1 = 20$ cm and $h_2 = 20$ cm.

TABLE II. SUMMARY OF THE RECOMMENDED SECTIONS TO ELIMINATE THE EFFECT OF HF.

Original Section			Recommended Section			
h ₁	h ₂	E ₂	h ₁	h ₂	E ₂	Notes
5	20	100	15	20	100	E1≥1250 MPa
			10	20	100	
10	20	100	15	35	250	E1≥1750 MPa
			10	35	125	
10	35	100	15	20	100	E1≥750 MPa
			15	35	250	
15	20	100	15	35	100	E1≥750 MPa
			15	35	250	
15	35	250	100	15	20	125
			20	20	250	E1≥750 MPa
			20	20	200	
20	20	100	20	30	100	
			20	30	250	

V. CONCLUSION

The work presented in this paper provides the corner stone and a new concept to eliminate the effects of horizontal forces, if exist, at critical sections on flexible pavement response:

1. The rational analysis quantifies the new required pavement sections and layer moduli to eliminate the effects of HF.
2. The key to eliminate the effects of HF is to compare between ϵ_t of straight sections (where no HF exist) and ϵ_t of critical sections where HF exist.
3. For a given asphalt mix properties, asphalt concrete layer thickness (h_1) has the greater effect to resist the negative influence of HF followed by the base layer modulus (E_2).
4. More reduction of the effect of HF on the flexible pavement response may achieved by increasing the thickness of base layer (h_2) followed by enhancing asphalt mix properties to increase its modulus (E_1).

Finally, it is recommended to conduct field and laboratory studies to determine the practical values of horizontal forces applied at the critical pavement sections, e.g. horizontal curves, intersections, steep upgrades, etc. Further studies should be conducted using practical values of horizontal wheel loads to develop new design charts for critical flexible pavement sections.

REFERENCES

1. Yang H. Huang, "Pavement Analysis and Design," Prince-Hall, Inc, 1993.
2. S. Khedr, A. El-Sayed, and A. El-Desouky, "Effect of Horizontal forces on flexible pavement response," Third International Conference on Civil & Architecture Engineering, MTC, Cairo, Egypt, March, 1999.
3. A. El-Desouky, S. Khedr, and A. El-Sayed, "Variation of flexible pavement behavior with Asphalt Concrete Modulus under various wheel loads," Third International Conference on Civil & Architecture Engineering, MTC, Cairo, Egypt, March, 1999.
4. A. El-Desouky, A. El-Sayed, and I. El-Sherief, "Effect of Various Tracked Vehicle Loads on Flexible Pavement Life," Ninth International Conference on Applied Mechanics, MTC, May, 2000.
5. A. El-Desouky, A. El-Sayed, and S. Fathalla, "Studying the response of airfield pavement during aircraft ground operations," Fifth International Conference on Civil & Architecture Engineering, MTC, Cairo, Egypt, Nov. 23-25, 2004.
6. A. El-Desouky and G. El-Shikhy, "Studing the Effect of Layer Properties on Flexible Pavement Response at Critical Highway

Sections," 9th Malaysian Road Conference, Kuala Lumpur, Malaysia, Nov. 10-12, 2014.

7. ANSYS12.1, Engineering Analysis System, Release 12.1, User's Manual, SAS IP, ANSYS University Copy, 2008.
8. The Asphalt Institute, "Thickness Design - Asphalt Pavements for Highways and Streets", Manual Series No. 1 (MS - 1), September 1981.
9. W. Uddin, D. Zhang, and F. Fernandez, "Finite Element Simulation of Pavement Discontinuities and Dynamic Load Response", Transportation Research Record, vol. 1448, pp.100-106, 1994.



Dr. Ahmed El-Desouky is an Assoc. Prof. of Civil Engineering, Military Technical College, Cairo, Egypt. He was born in Aug. 9th, 1971 and he graduated in 1993 from Department of Civil Engineering, Military Technical College with grade excellent with honor. He worked as a Teaching Assistant from 1994-1998 when he was awarded the Master Degree in Civil Engineering in the field of roads and airports. In 2000 he started his Ph.D. Study at Carleton

University, Ottawa, Canada and in 2003 he was awarded the PhD degree in Civil Engineering in the field of Airports. He worked as a lecturer in the Department of Civil Engineering for 7 years until he was promoted to Assoc. Prof. of Civil Engineering in 2010. During his work in the Military technical college, Dr. El-Desouky was the Head of Civil Engineering Department twice, 2010-2011 and then 2012 to 2014. Dr. El-Desouky have participated in 8 research projects, supervised 13 master and Ph.D. theses and published more than 40 papers in journals and international conferences. Finally Dr. El-Desouky is a member of Egyptian Engineering Syndicate since 1993 and he was awarded its award in the same year.



Eng. Gamal El-Sheaky is a Ph.D. Candidate, Department of Civil Engineering, Military Technical College, Cairo, Egypt. He was born in Feb. 6th, 1973 and he graduated in 1996 from Department of Civil Engineering, Military Engineering Academy, Tajoura, Tripoli, Libya. He worked as a supervisor and technical manager in many projects in Libya from 1996-2008. He was awarded the Master Degree in Civil Engineering in the field of roads and airports from Military technical College, Cairo, Egypt in 2011.

Mr. El-Sheaky worked as a general manager at Libyan Military Works from 2011 to 2013. He got a mini-Master of Business Administration in 2013 and a professional Diploma in Human Resources in 2014 from Cairo University, Giza, Egypt. In 2014 he started his Ph.D. Study at the Military Technical College in the field of Flood Control.